

NOTE:
DO NOT USE THIS SHEET FOR LAYOUT
OF NEW SIDEWALK, CURBING, ETC.
REFER TO SHEET S-1



NOTE - MODIFY THIS PLAN AS FOLLOWS.
1. Delete (1) AR at proposed bus shelter and from Plant List.
2. Relocate Shrubs near proposed bus shelter without changing quantity.

PLANTING NOTES

- CONTRACTOR TO VERIFY THE LOCATION OF ALL UTILITY LINES PRIOR TO PLANTING AND REPORT ANY CONFLICT TO THE OWNERS REPRESENTATIVE.
- PLANT NO TREES OR SHRUBS BEFORE ACCEPTANCE OF ROUGH GRADING. OWNERS REPRESENTATIVE RESERVES THE RIGHT TO REJECT PLANTS PRIOR TO AND AFTER PLANTING.
- LAWN AREAS WITHIN THE LIMIT OF WORK OR OUTSIDE THE LIMIT OF WORK WHICH ARE DISTURBED DURING CONSTRUCTION (INCLUDING PLANTING OPERATIONS) SHALL BE RETURNED TO ORIGINAL GRADE, LOAMED AND SEED BY THE CONTRACTOR AT NO ADDITIONAL EXPENSE TO THE OWNER.
- PLANTS SHALL BE WELL WATERED FOR THE FIRST YEAR FOLLOWING ACCEPTANCE.
- PLACE 15" PLANTING MEDIUM IN ALL SHRUB BEDS. MIN 6" LOAM IN ALL AREAS DESIGNATED FOR LOAM AND SEED.
- PLANT BEDS FOR SHRUB PLANTINGS SHALL BE CONTINUOUS UNLESS NOTED OTHERWISE.
- OWNERS REPRESENTATIVE TO APPROVE PLANT MATERIALS PRIOR TO DELIVERY TO SITE AND AGAIN AT SITE PRIOR TO PLANTING.
- NO SUBSTITUTION OF PLANT SPECIES OR VARIETIES WITHOUT OWNERS REPRESENTATIVE WRITTEN APPROVAL.
- STAKE OUT PLANTS AND PLANT BEDS IN THEIR APPROXIMATE LOCATION. ADJUST LOCATIONS OF STAKES AS DIRECTED BY OWNERS REPRESENTATIVE TO ACCOUNT FOR UTILITIES AND OTHER FIELD CONDITIONS. OWNERS REPRESENTATIVE TO APPROVE FINAL STAKE LOCATIONS PRIOR TO PLANTING.
- COMPLETE QUANTITIES OF PLANTS FOR EACH AREA TO BE AVAILABLE ON SITE AT THE TIME OF PLANTING FOR FIELD LAYOUT BY THE OWNERS REPRESENTATIVE. NO PARTIAL LAYOUT AND PLANTING OF AREAS WILL BE ACCEPTABLE.
- LOOSE OR CRACKED ROOTBALLS ARE UNACCEPTABLE AND WILL BE REJECTED.
- REMOVE WIRE BASKETS, REMOVE TOP 1/3 OF BURLAP. SYNTHETIC BURLAP WILL NOT BE ACCEPTED. FOR CONTAINER PLANTS, REMOVE CONTAINER AND SCARIFY EDGES OF ROOTBALL 1/2 INCH DEEP IN A MINIMUM OF FOUR LOCATIONS AND AT BOTTOM OF ROOTBALL.
- RAISE AND REPLANT PLANT MATERIAL THAT SETTLES AFTER PLANTING AND WATERING.
- WATER PLANTS THOROUGHLY AFTER INSTALLATION, A MINIMUM OF TWICE WITHIN THE FIRST 24 HOURS.


QTY	SYM	BOTANICAL NAME	COMMON NAME	SIZE	ROOT	SPACING	REMARKS
DECIDUOUS TREES							
5	AC	Amelanchier x grandiflora 'Autumn Brilliance	Autumn Brilliance Service Berry	6-7' Ht.	B&B	AS SHOWN	Multistem
9	AR	Acer rubrum	Red Maple	2-2 1/2' Cal.	B&B	AS SHOWN	Full
3	ARA	Acer rubrum 'Armstrong'	Armstrong Maple	10-12' Ht.	B&B	AS SHOWN	Full
3	MP	Malus 'Prairie Fire'	Prairie Fire Crabapple	2-2 1/2' Cal.	B&B	AS SHOWN	Full
1	MW	Malus 'Donald Wyman'	Donald Wyman Crabapple	2-2 1/2' Cal.	B&B	AS SHOWN	Full
3	PA	Prunus Accolade	Accolade Cherry	2-2 1/2' Cal.	B&B	AS SHOWN	Full
7	SR	Syringa reticulata	Tree Lilac	6-7' Ht.	B&B	AS SHOWN	Multistem
3	TC	Tilia cordata 'Greenspire'	Greenspire Littleleaf Linden	2-2 1/2' Cal.	B&B	AS SHOWN	Full
2	UA	Ulmus americana 'Princeton'	Princeton American Elm	2-2 1/2' Cal.	B&B	AS SHOWN	Full
EVERGREEN TREES							
10	TO	Thuja occidentalis 'Nigra'	Dark American arborvitae	6-7' Ht.	B&B	AS SHOWN	Full
SHRUBS							
5	CA	Cornus alba 'Argenteo-margenata	Variagated Red Twig Dogwood	#3	Container	4' O.C.	Full
6	DL	Diervilla lonicera	Dwarf Bush Honeysuckle	#3	Container	3' O.C.	Full
78	JC	Juniperus chinensis	Sargent Juniper	#3, 2-2 1/2'	Container	5' O.C.	Full, Nursery Grown
13	LA	Ligustrum amurense	Amur Privet	2-3'	Container	4' O.C.	Full, Nursery Grown
24	PO	Physocarpus opulifolius 'Little Devil'	Little Devil Ninebark	#5	Container	4' O.C.	Full
3	PD	Physocarpus opulifolius 'Diablo'	Diablo Ninebark	#7	Container	9' O.C.	Full
48	RA	Rhus aromatica 'Grow Low'	Grow Low Sumac	#2	Container	5' O.C.	Full, Nursery Grown
9	SP	Spirea japonica 'Little Princess'	Little Princess Spirea	#5	Container	3' O.C.	Full
12	SM	Syringa meyeri 'Palladin'	Dwarf Korean Lilac	#6	Container	4' O.C.	Full

NOTES:
1) FOR CONTAINER GROWN PLANTS, SCORE AND SPREAD ROOTS IN 4 EQUAL AREAS ON SIDES OF ROOTS/SOIL. SCARIFY AND SPREAD ROOTS ON BOTTOM OF PLANT.
2) FOR PRUNING, SEE SPECIFICATIONS

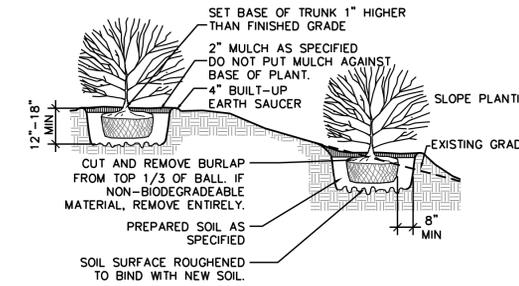


1 SHRUB PLANTING
Scale: N/A

NOTES:
1) ON TREES BELOW 3" CAL. USE WOOD STAKES
2) ON TREES 4" CAL. OR GREATER USE GUYING CABLES
3) IF GUYING CABLES USE 3 PER TREE MIN. AS NEEDED
4) REMOVE ALL OF WIRE BASKETS ON ROOTBALL, TYP.

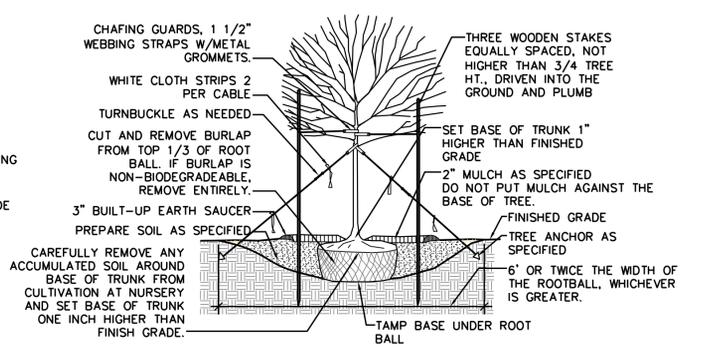

2 TREE PLANTING
Scale: N/A



COPOLN ASSOCIATES
Landscape Architecture and Planning
112 Cottage Street 207 288-4122
Bar Harbor, Maine 04609 FAX 207 288-5269

NO.		REVISIONS	DATE
SCALE:		AS NOTED	
DATE:		6/8/12	
DRAWN BY:		MR/SRC	
CHECKED BY:		SRC	
APPROVED:		[Signature]	
FIELD BK:		53	
FILE:		---	
PROJECT:		#42501	

TOWN OF SKOWHEGAN
SKOWHEGAN, MAINE

MUNICIPAL PARKING LOT
PEDESTRIAN CONNECTOR PROJECT

SITE LANDSCAPE PLAN

DIRIGO ENGINEERING
2 DIRIGO DRIVE, FAIRFIELD, MAINE 04937 (207) 453-2401

SHEET 6 of 8
L-1